



That makes Sense!

LVT (PVC) - Serie

Wear layer | Nutzschrift | Toplaag | **strato d'usura**

Thickness | Stärke | Dikte | **spessore**

Width | Breite | Breedte | **larghezza**

Length | Länge | Lengte | **lunghezza**

LL

0,55 mm

5 mm

228,6 mm

1219,2 mm



Technical data | Technische Daten | Dati Tecnici

Bevelled edges | Gefasste Microkante | **microbisellatura**

Utilization class | Nutzungsklasse | **classe d'usura**

Surface treatment | Oberflächevergütung | **trattamento superficiale**

Dimensional stability | Dimensionstabilität | **stabilità dimensionale**

Behaviour to fire | Brandverhalten | **classe di reazione al fuoco**

Slip resistance | Rutschhemmung | **resistenza allo scivolamento**

Thermal conductivity | Wärmedurchlasswiderstand | **conduttività termica**

Impact sound reduction | **isolamento dal rumore da calpestio**

Guarantee | Garantie domestic | Wohnbereich | **uso domestico**

Garanzia commercial | gewerblich | **uso commerciale**

4 -sides | 4 - Seitig | 4 - zijden **4 - lati**

23 | 32 | 42

2kPU

< 0,10%

Bfl - s1

DS

0,045 m2K/W (max 28 °C)

19 dB + Soundlezzz


15 years | Jahre | Jaren | **Anni**

5 years | Jahre | Jaren | **Anni**

Decors | Dekore | Decori




LL850

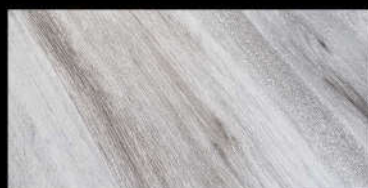

LL855



LL860

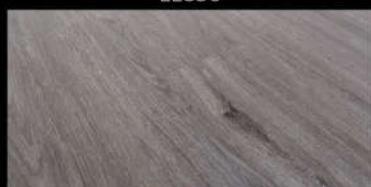

LL865



LL870



LL875



LL880



LL885



LL890



LL895





That makes Sense!

LVT (PVC) - Serie

Wear layer | Nutzschrift | Toplaag | **strato d'usura**
Thickness | Stärke | Dikte | **spessore**
Width | Breite | Breedte | **larghezza**
Length | Länge | Lengte | **lunghezza**

LL

0,55 mm
5 mm
609,6 mm
609,6 mm



Technical data | Technische Daten | Dati Tecnici

Bevelled edges | Gefasste Microkante | **microbisellatura**
Utilization class | Nutzungsklasse | **classe d'usura**
Surface treatment | Oberflächevergütung | **trattamento superficiale**
Dimensional stability | Dimensionstabilität | **stabilità dimensionale**
Behaviour to fire | Brandverhalten | **classe di reazione al fuoco**
Slip resistance | Rutschhemmung | **resistenza allo scivolamento**
Thermal conductivity | Wärmedurchlasswiderstand | **conduttività termica**
Impact sound reduction | **Isolamento dal rumore da calpestio**
Garantee | Garantie domestic | Wohnbereich | **uso domestico**
Garanzia commercial | gewerblich | **uso commerciale**

4 -sides | 4 - Seitig | 4 - zijden | **4 - lati**
23 | 32 | 42
2kPU
< 0,10%
Bfl - s1
DS
0,045 m2K/W (max 28 °C)
19 dB + Soundlezzz
15 years | Jahre | Jaren | **Anni**
5 years | Jahre | Jaren | **Anni**

Decors | Dekore | Decori



LL803



LL804



www.prodinex.com