




That makes Sense!

LVT (PVC) - Serie

Wear layer | Nutzschrift | Toplaag | **strato d'usura**
Thickness | Stärke | Dikte | **spessore**
Width | Breite | Breedte | **larghezza**
Lenght | Länge | Lengte | **lunghezza**

N

0,3 mm
2 mm
187 mm
1227 mm



Technical data | Technische Daten | Dati Tecnici

Bevelled edges | Gefasste Microkante | **microbisellatura**
Utilization class | Nutzungsklasse | **classe d'usura**
Surface treatment | Oberflächevergütung | **trattamento superficiale**
Dimensional stability | Dimensionstabilität | **stabilità dimensionale**
Behaviour to fire | Brandverhalten | **classe di reazione al fuoco**
Slip resistance | Rutschhemmung | **resistenza allo scivolamento**
Thermal conductivity | Wärmedurchlasswiderstand | **conduttività termica**
Impact sound reduction | **Isolamento dal rumore da calpestio**
Garantie | Garantie domestic | Wohnbereich | **uso domestico**
Garanzia

none | kein | geen | **no**
23 | 31
2kPU
< 0,10%
Bfl - s1
DS
0,02 m²K/W (max 28 °C)
...
10 years | Jahre | Jaren | **Anni**

Decors | Dekore | Decori



N250



N260



N300



N310



N320



N350



N410



N460




N480



N660



N670

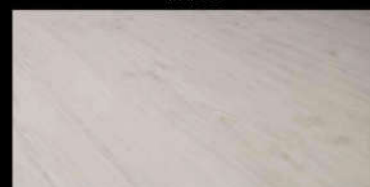

N690



www.prodinex.com