



That makes Sense!

## LVT (PVC) - Serie

Wear layer | Nutzschrift | Toplaag | **strato d'usura**  
 Thickness | Stärke | Dikte | **spessore**  
 Width | Breite | Breedte | **larghezza**  
 Length | Länge | Lengte | **lunghezza**

P



0,55 mm  
 2,5 mm  
 228,6 mm  
 1219,2 mm

### Technical data | Technische Daten | Dati Tecnici

Bevelled edges | Gefasste Microkante | **microbisellatura**  
 Utilization class | Nutzungsklasse | **classe d'usura**  
 Surface treatment | Oberflächevergütung | **trattamento superficiale**  
 Dimensional stability | Dimensionstabilität | **stabilità dimensionale**  
 Behaviour to fire | Brandverhalten | **classe di reazione al fuoco**  
 Slip resistance | Rutschhemmung | **resistenza allo scivolamento**  
 Thermal conductivity | Wärmedurchlasswiderstand | **conduttività termica**  
 Impact sound reduction | **Isolamento dal rumore da calpestio**  
 Garantie | Garantie domestic | Wohnbereich | **uso domestico**  
**Garanzia** commercial | gewerblich | **uso commerciale**

4 -sides | 4 - Seitig | 4 - zijden | **4 - lati**  
 23 | 33 | 42  
 2kPU  
 < 0,10%  
 Bfl - s1  
 DS  
 0,025 m2K/W (max 28 °C)  
 4 dB  
 15 years | Jahre | **Anni**  
 5 years | Jahre | **Anni**

### Decors | Dekore | Decori



P250



P260



P300



P310



P320



P350



P410



P460




P480



P660



P670

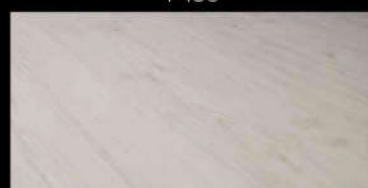

P690






That makes Sense!

## LVT (PVC) - Serie

Wear layer | Nutzschrift | Toplaag | **strato d'usura**  
Thickness | Stärke | Dikte | **spessore**  
Width | Breite | Breedte | **larghezza**  
Length | Länge | Lengte | **lunghezza**

**P**  
0,55 mm  
2,5 mm  
228,6 mm  
1219,2 mm



### Technical data | Technische Daten | Dati Tecnici

Bevelled edges | Gefasste Microkante | **microbisellatura**  
Utilization class | Nutzungsklasse | **classe d'usura**  
Surface treatment | Oberflächevergütung | **trattamento superficiale**  
Dimensional stability | Dimensionstabilität | **stabilità dimensionale**  
Behaviour to fire | Brandverhalten | **classe di reazione al fuoco**  
Slip resistance | Rutschhemmung | **resistenza allo scivolamento**  
Thermal conductivity | Wärmedurchlasswiderstand | **conduttività termica**  
Impact sound reduction | **Isolamento dal rumore da calpestio**  
Guarantee | Garantie domestic | Wohnbereich | **uso domestico**  
**Garanzia** commercial | gewerblich | **uso commerciale**

4 -sides | 4 - Seitig | 4 - zijden | **4 - lati**  
23 | 33 | 42  
2kPU  
< 0,10%  
Bfl - s1  
DS  
0,025 m2K/W (max 28 °C)  
4 dB  
15 years | Jahre | **Anni**  
5 years | Jahre | **Anni**

### Decors | Dekore | Decori



P110



P120



P140



P210



P220



P370



P400



P470



P550



P580



P650



P680

